


For best results, locate a suitable site for your fountain that is leveled and provides pleasing viewing angles.
 Note: Always follow local electrical codes and use a 110V GFCI protected outlet.

5010F13

1. Locate a suitable site for your Finial Spill Fountain In Crested Pool, 13pc. Site should be level and provide a pleasing viewing angle.
2. Locate the 6598 Pool in the center of your site. Bowl must be level.
3. Place P15 Pump next to Standpipe add ADAPTER 1"MNPT X 3/4" BARB. Slip pump cord through standpipe and pull cord out from bottom of pool. Seal cord with RS1.5 rubber stopper and corks. Corks will be remove if order AB8740 lights.
4. Connect NKT3/4" X 66" Tubing over outlet of Pump. Secure Tubing with CLAMP MED SS.
5. Set 7330 Large Pedestal in center of Pool and measure between other side of base and the pool wall to make sure the base is centered.
6. As you place the 6810S Bowl over the 7330 Large Pedestal feed Tubing feed through the opening of the 6810S Bowl.
7. Feed NKT3/4" X 66" Tubing through STP1 X 7" Stand Pipe and connect Stand Pipe to 6810S Bowl.
8. Place 7820 Pedestal Riser on top of the 6810S Bowl. Feed tubing trough 7820 Pedestal Riser.
9. Place 6820 Bowl over 7820s Pedestal Riser and feed tubing as well.
10. Connect Tubing to TEE3/4" (SEE ALLUSTRATION). Use Clamp#56 to secure tubing. Add CAULKING TAPE X 4"
 - NKT3/4" X 4" connects to one end of TEE then connect ADAPTER 1/2"MNPT X 1/2"BARB to Tubing. See that the MNPT from adapter will connect to NKT3/4" Tubing. The other end will connect NKT12" X 12" Tubing slip R1 restrictor.
 - The other end of TEE3/4" will connect NKT3/4" X 8" slip R1 restrictor.
11. Place 715 Pump Cover over 6820 Bowl.
12. NKT1/2" X 12" will provide water to Finial top piece.
13. As you place the 5010 Finial on top of 7150 Pump Cover feed tubing through Pump Cover. Connect tubing to NIPPLE 1/4"MNPT X 3.25" use CLAMP#38 to secure Tubing. Add CAULKING TAPE X 4" to seal water on Brass Nipple and 5010 Finial.
14. Fill all Bowl and pool with water. Plug pump into 110V GFCI protected outlet. Adjust Water flow with R1 Restrictors.
15. Finally, place the four 9024 Surround Sections around the fiberglass pool and align evenly.

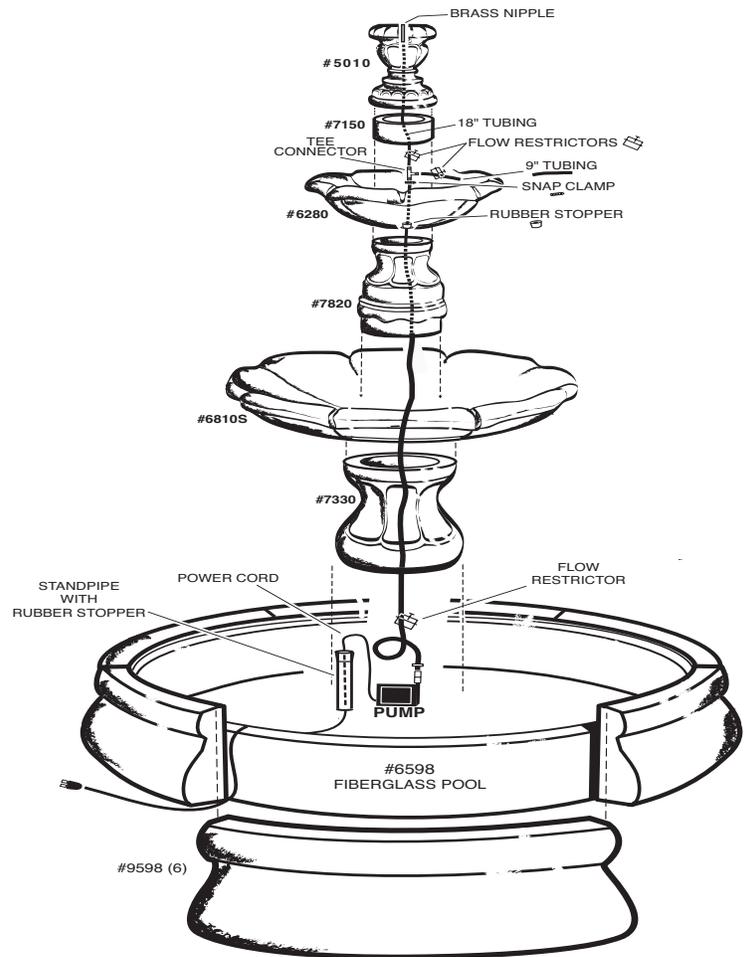

IMPORTANT - WINTER CARE:

Do not allow water to collect and freeze in fountain bowl(s) or shell(s). Do not allow fountain pieces to sit in a pool of ice. Disassemble entire fountain and pump and store indoors during the winter season.

If you cannot store your fountain indoors during the winter season, you must at least protect it from ice collection or exposure: first, remove the statue(s) and pump, storing them inside if possible. Next, locate the drain plug on the underside of bowl(s) or shell(s). Remove the drain plug to drain any water "trapped" between the walls of the bowl(s) or shell(s). Then fill the bowl(s) or shell(s) with an absorbent material, such as burlap, blankets, etc. Finally, cover the entire fountain with a Henri Fountain Cover. Should condensation droplets form on the inside of the cover, the material will absorb them.

By following these simple and sensible precautions during the winter season, you will protect your fountain for years of beauty and enjoyment!

CAUTION: The use of Chlorine or Chlorine Bleach may damage the finish of your fountain. When cleaning your fountain, it is best to test the cleaning agent on an underside or back surface to determine the agent's suitability. We recommend the use of a mild, non-abrasive treatment, such as Henri Lime Remover and Preventer. To avoid foaming, thoroughly rinse the fountain to remove the entire cleaning agent.